
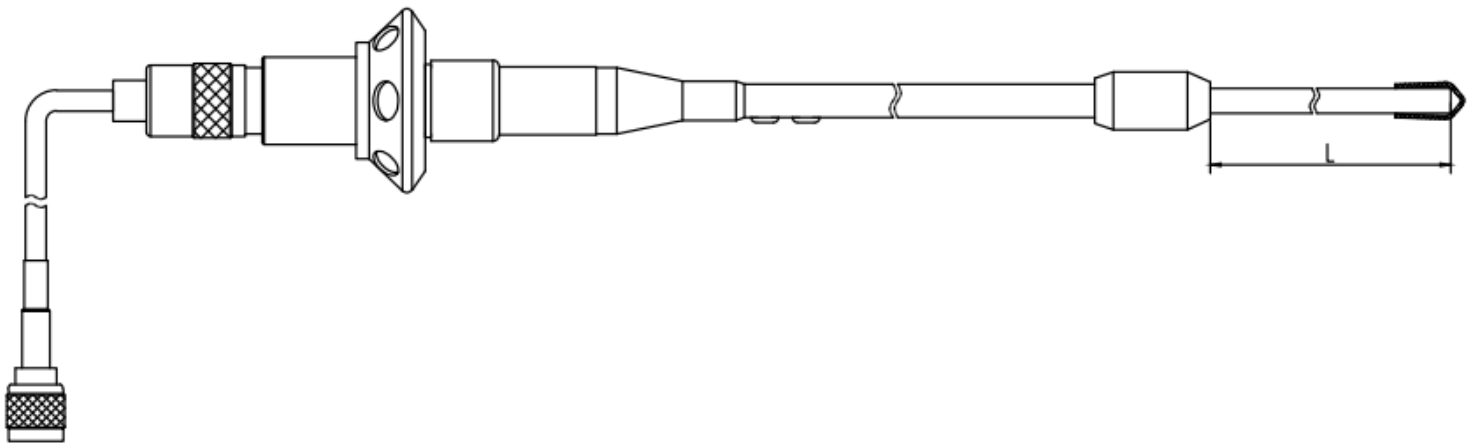


# DECADE FM108-GP2 OMNI-DIRECTIONAL ANTENNA INSTRUCTIONS

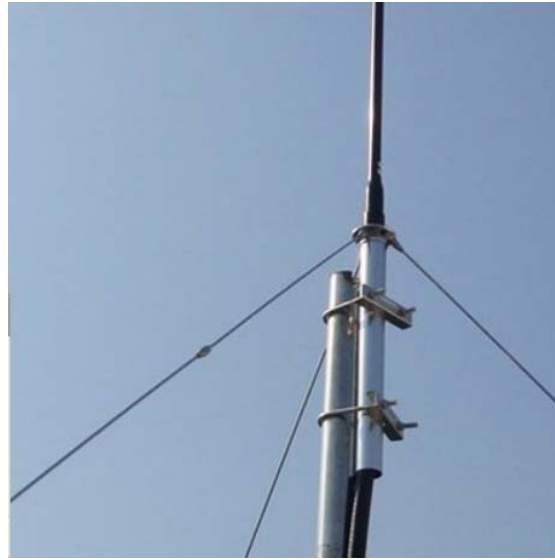

MHz	88	90	92	94	96	98	100	102	104	106	108
L (mm)	261	210	210	190	190	125	101	101	62	62	25
L (inches)	10.25	8.25	8.25	7.50	7.50	5.00	4.00	4.00	2.50	2.50	1.00

## ASSEMBLY INSTRUCTIONS

1. Insert the 3 ground plane rods into the antenna base and tighten.
2. Remove the screw that holds the sleeve on the base and remove the sleeve.
3. Insert the coaxial cable through the sleeve and plug it into the UHF female connector (SO-239) beneath the base, and tighten the sleeve on the base using the screw.
4. Loosen the two Allen screws at the tip of the main rod and adjust length « L » (see drawing) according to the transmitting frequency (see chart). Tighten the two Allen screws.
5. Screw the main rod into the UHF female connector (SO-239) on top of the base.
6. Mount the antenna on a pipe or mast using the supplied mounting brackets.



3480 Du Renard street, Sherbrooke, Quebec, Canada J1H 0C7  
 tel.: (819) 563-4323, toll free: 888-428-4323  
<http://www.decadetransmitters.com>  
[info@decadetransmitters.com](mailto:info@decadetransmitters.com)